

Performance Evaluation of Different Equalization Techniques for QAM in Wireless Communication

Rashmi Kashyap¹, Saurabh Mitra²

^{1,2}Asst. Prof, Dept of EC, Dr. C.V. Raman University, Bilaspur (C.G.) India.

ABSTRACT

Due to the distortive character of the propagation environment and High bit data rate transmission over wireless channel makes the channel response extend over more than one symbol period transmitted data symbols will spread out in time and will interfere with each other, a phenomenon called Inter Symbol Interference (ISI). This is undesirable and makes the recovery of signal difficult. Equalization is method which is commonly employed to fight with ISI. In this paper different equalizer has been analyzed and compared for 2x2 MIMO channel.

Keywords- DPSK, MIMO, interference, MMSE, Zero forcing AWGN, Rayleigh

I INTRODUCTION

The emergence of internet and mobile technology has enabled us to share video, text, voice and all other information in all over the world. Introduction of wireless and 3G mobile technology has made it possible to transfer the data at very high speed while keeping the high quality of the data intact. To achieve high quality data at very high data rate is a big challenge. These problems can be minimized by applying Orthogonal Frequency division Multiplexing technology. Unlike wired media, in wireless media, signal reach the receiver from different path and hence lead to the inter symbol interference. This inter symbol interference phenomenon causes the increased bit error rate [1].

Generally in designing the communication system, it is assumed that the AWGN Channel or non dispersive channel passes all the frequency which is practically not possible.

For any band-limited or dispersive channel, the impulse response of the channel resembles the impulse response of ideal low pass filter. Due to this the transmitted signal is smeared in time and hence spread the symbols length causing the overlapping of adjacent symbols. The interference caused by this phenomenon is known as inter-symbol interference (ISI). This phenomenon is undesirable in communication system and increased the bit error rate (BER) and hence need to be resolved correctly. This problem of ISI can be overcome by either designing the band-limited pulses otherwise known as nyquist pulses for transmission or by filtering the received signal to suppress the effect of ISI introduced by the impulse response of the channel. The process of mitigating the effect of ISI by using appropriate filtering operation is known as equalization process [2]. This paper presents a performance evaluation of some of the equalization techniques like zero forcing, zero forcing with successive interference cancelling (ZF-SIC), MMSE, ZF-SIC with optimal ordering, Maximum likelihood (ML) equalizer, MMSE-SIC with optimal ordering 2x2 MIMO system under Rayleigh fading and noisy channel.

II BASE WORK

- (a) **Quadrature Amplitude Modulation (QAM)-** Quadrature amplitude modulation (QAM) is a modulation scheme in which two sinusoidal carriers, one exactly 90 degrees out of phase with respect to the other, are used to transmit data over a given physical channel. Because the orthogonal carriers occupy the same frequency band and differ by a 90 degree phase shift, each can be modulated independently, transmitted over the same frequency band, and separated by demodulation at the receiver. For a given available bandwidth, QAM enables data transmission at twice the rate of standard pulse amplitude modulation (PAM) without any degradation in the bit error rate (BER). QAM and its derivatives are used in both mobile radio and satellite communication systems. Fig1.8 shows the block diagram of QAM and Fig1.9 shows the waveform of QAM.
- (b) **Channel Model-AWGN** (additive white Gaussian Noise) is model of channel which produces only white Gaussian noise (having Gaussian distribution) whose spectral density is constant. This channel model does not introduce frequency selectivity, fading dispersion and interference phenomenon. This channel model is sufficient enough to analyze the effect of Gaussian noise coming from various natural sources [3] with the simple mathematical model. Fading is the phenomenon of introducing distortion in carrier modulated signal in some propagation medium [4]. The main reason of fading phenomenon in wireless media is multipath propagation which results in transmitting signal's reaching the receiver by two or more path. These different paths introduce constructive and destructive interference in the signal causing phase shifting of the signal. Rayleigh fading is one of the types of fading which occurs due to the multipath reception. It can be simulated with the help of statistical model for analyzing the effect of propagation environment on a signal [3].

Channel model having the characteristics of multipath environment can be simulated. The




Fig. 1.2 Impulse Response of multipath Channel

Apart from experiencing multipath effect, the transmitted signal is also affected by AWGN

$$p(x) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}}$$

(Absolute Gaussian noise) noise n . This noise is represented by Gaussian function given by Here the μ represents the mean of distribution and σ is variance.

With the known channel response $h(k)$ and noise n , the signal received at the receiver is given by $y(k) = x(k) \otimes h(k) + n$

here the \otimes represents the convolution operation[5].

(c) **Equalizer**-Equalization is the process of mitigating the ISI effect by decreasing the error probability which occurs in the communication system when no ISI suppression method is applied. But since the suppression of ISI tends to enhance the noise power therefore the optimum balance between noise power enhancement and suppression of ISI need to catered [4].

(i) **Adaptive equalization**[7][8]- An adaptive equalizer is a type of digital filter or equalization filter which is designed in such a way that it automatically adapts itself to the time varying properties of communication channel. This technique is frequently used to mitigate the distortion produced by multipath effect.

(ii) **Zero Forcing Equalizer**[9][10]- Proposed by Robert lucky, zero forcing method of equalization is a linear equalization method which restores the transmitted signal by inverting the frequency response of the channel. The name zero forcing comes from the fact that it is able to reduce the ISI to zero value in case of noise free environment.

(iii) **MMSE Equalizer** [11]- This type of equalizer uses the squared error as performance measurement [11]. The receiver filter is designed to fulfill the minimum mean square error criterion. Main objective of this method is to minimize the error between target signal and output obtained by filter.

impulse response of 3-tap multipath channel model with spacing T is shown below-

$$h[k] = [h_1 \ h_2 \ h_3]$$

(iv) **Zero Forcing with Successive Interference cancellation (ZF-SIC) Equalizer** [12] -

In this method, first of all the zero forcing equalizer find the estimated symbol x_1 and x_2 then one of the estimated symbol is subtracted from received symbol to compute the equalized symbol by applying maximum ration combining(MRC)[36].

(v) **Successive Interference Cancellation using optimal ordering Equalizer** [13]-

In the previous successive interference cancellation method, estimation symbol is chosen arbitrarily and then its effect is subtracted from received symbol y_1 and y_2 . A better result can be obtained if we choose estimated symbol whose influence is more than other symbol. For this first of all the power of both the symbol is computed at the receivers and then the symbol having higher power is chosen for subtraction process.

(vi) **MMSE SIC with optimal ordering** [14]-

The same concept of successive interference with optimal ordering can also be applied to the MMSE equalizer and the resultant equalizer is known as MMSE SIC with optimal equalizer.

(vii) **ML (Maximum Likelihood) Equalizer** -

Let x represent the signal matrix, H represent the channel response and n represent the noise then the signal obtained at the receiver is given by

III METHODOLOGY

In order to analyze how different techniques of equalization perform in MIMO having noisy and rayleigh channel characteristics, a simulation program is designed for all the six method in MATLAB environment.

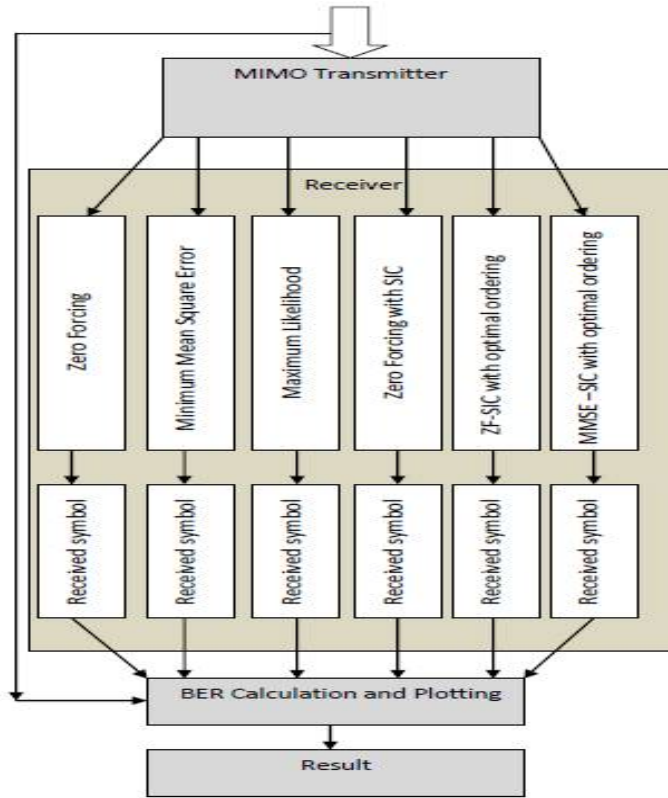


Fig. 4.1 Flow Diagram of Methodology

IV EXPERIMENTAL RESULTS

Here is the performance of all the six equalizer for QAM in 2x2 MIMO System

(a) BER for ZF Equalizer

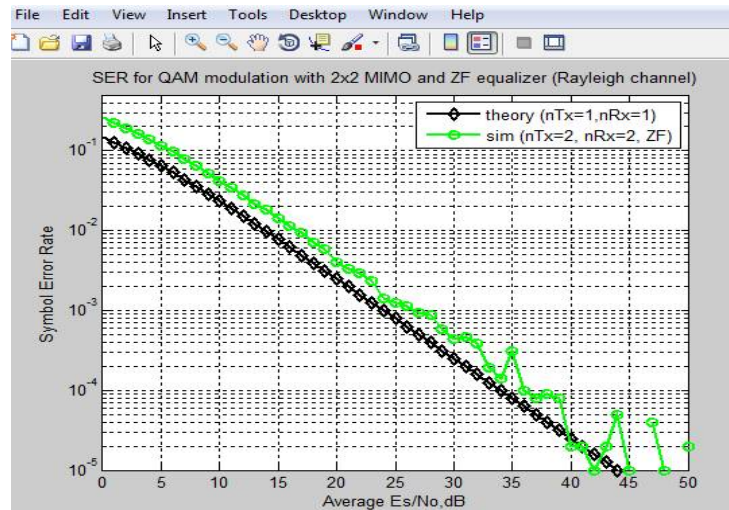


Fig.1 BER for ZF Equalizer for QAM

Table 1
Theoretical and Simulated BER table for ZF equalizer (QAM Modulation)

Eb/No In dB	Theoretical BER for nTx=1,nRx=1	Theoretical BER for nTx=1,nRx=1(MRC)	Simulated BER for nTx=2,nRx=2(ZF)
0	0.146447	0.058058	0.258012
10	0.023269	0.001599	0.042425
20	0.002481	1.84E-05	0.004732
30	0.00025	1.87E-07	0.000429
40	2.5E-05	1.87E-09	0.000051

Fig.1 and table 1 shows the BER performance for QAM modulation for 2x2 MIMO system using ZF equalizer in Rayleigh channel. Black lines show the theoretically ideal value for BER. Green line shows

the simulation result. From the graph we can see that ZF equalizer shows much improvement in SNR. Table shows that as per SNR increases the value of BER decreases for ZF equalizer.

(b) BER for ZF-SIC Equalizer

Table 2
Theoretical and Simulated BER table for ZF-SIC equalizer (QAM Modulation)

Eb/No In dB	Theoretical BER for nTx=1,nRx=1	Theoretical BER for nTx=1,nRx=1(MRC)	Simulated BER for nTx=2,nRx=2(ZF-SIC)
0	0.146447	0.058058	0.24786
10	0.023269	0.001599	0.08414
20	0.002481	1.84E-05	0.05823
30	0.00025	1.87E-07	0.05447
40	2.5E-05	1.87E-09	0.05456

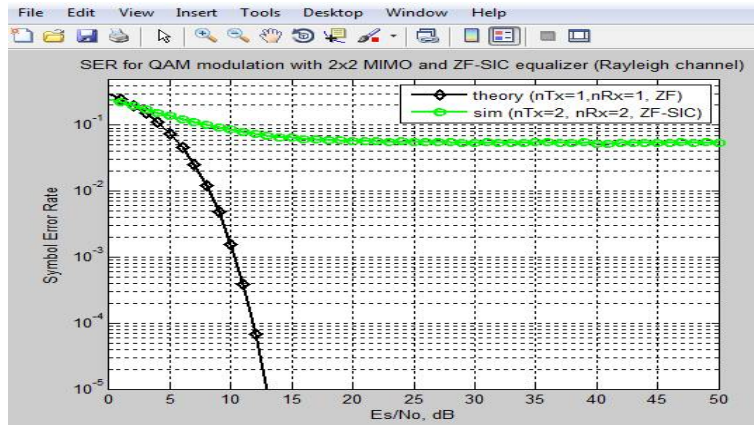


Fig. 2 BER for ZF-SIC Equalizer for QAM

Fig. 2 and table 2 shows the BER performance for QAM modulation for 2x2 MIMO system using ZF-SIC equalizer in Rayleigh channel. Black lines show the theoretically ideal value for BER. Green line

shows the simulation result. From the graph we can see that ZF-SIC does not show the much improvement in SNR.

(c) BER for MMSE Equalizer

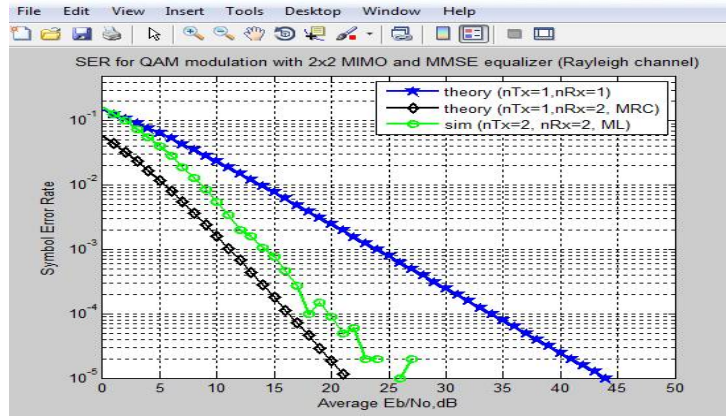


Fig. 3 BER for MMSE Equalizer for QAM

Table 3
Theoretical and Simulated BER table for MMSE equalizer (QAM Modulation)

Eb/No In dB	Theoretical BER for nTx=1,nRx=1	Theoretical BER for nTx=1,nRx=1(MRC)	Simulated BER for nTx=2,nRx=2(MMSE)
0	0.146447	0.058058	0.205458
10	0.023269	0.001599	0.017327
20	0.002481	1.84E-05	0.001336
30	0.00025	1.87E-07	0.000136
40	2.5E-05	1.87E-09	0.000013

Fig and table 3 shows the BER performance for QAM modulation for 2x2 MIMO system using MMSE equalizer in Rayleigh channel. Black lines show the theoretically ideal value for BER. Green

line shows the simulation result. From the graph we can see that MMSE shows the much improvement result as compare to ZF and ZF-SIC equalizer.

(d) BER for ZF-SIC Optimal Order Equalizer

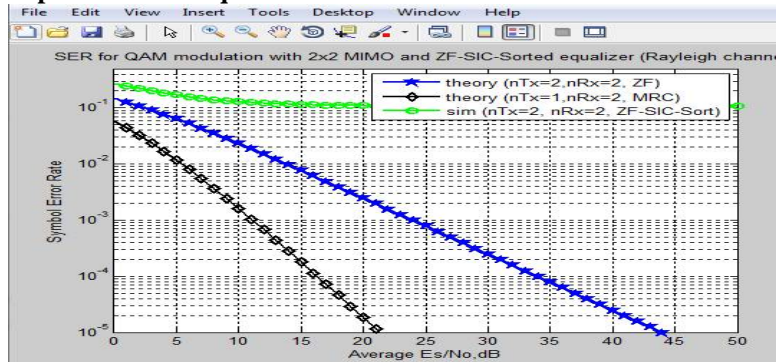


Fig.4 BER for ZF-SIC OPTIMAL ORDER Equalizer for QAM

Table 4
Theoretical and Simulated BER table for ZF-SIC with optimal order equalizer (QAM Modulation)

Eb/No In dB	Theoretical BER for nTx=1,nRx=1	Theoretical BER for nTx=1,nRx=1(MRC)	Simulated BER for nTx=2,nRx=2(ZF-SIC sort)
0	0.146447	0.058058	0.24786
10	0.023269	0.001599	0.08414
20	0.002481	1.84E-05	0.05823
30	0.00025	1.87E-07	0.05447
40	2.5E-05	1.87E-09	0.05456

Fig and table 4 shows the BER performance for QAM modulation for 2x2 MIMO system using ZF-SIC with optimal order equalizer in Rayleigh channel. Black lines show the theoretically ideal

value for BER. Green line shows the simulation result. From the graph we can see that ZF-SIC with optimal order does not show the much improvement in SNR.

(e) BER For MMSE-SIC Optimal Order Equalizer

Table 5
Theoretical and Simulated BER table for MMSE with optimal order equalizer

Eb/No In dB	Theoretical BER for nTx=1,nRx=1	Theoretical BER for nTx=1,nRx=1(MRC)	Simulated BER of MMSE-SIC for nTx=2,nRx=2
0	0.146447	0.058058	0.22533
10	0.023269	0.001599	0.08221
20	0.002481	1.84E-05	0.05679
30	0.00025	1.87E-07	0.0548
40	2.5E-05	1.87E-09	0.05359

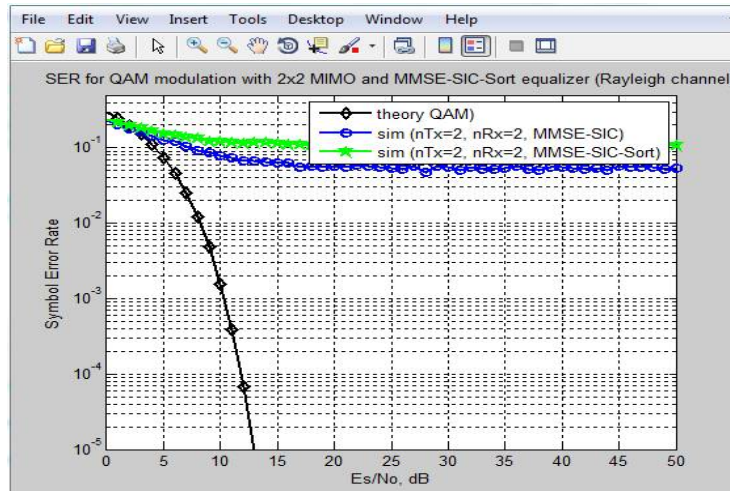


Fig. 5 BER for MMSE-SIC Optimal Order Equalizer for QAM

Fig and table 5 shows the BER performance for QAM modulation for 2x2 MIMO system using MMSE-SIC with optimal order equalizer in Rayleigh channel. Black lines show the theoretically ideal

value for BER. Green line shows the simulation result. From the graph we can see that MMSE-SIC with optimal order does not show the improvement in SNR.

(f) BER for ML Equalizer

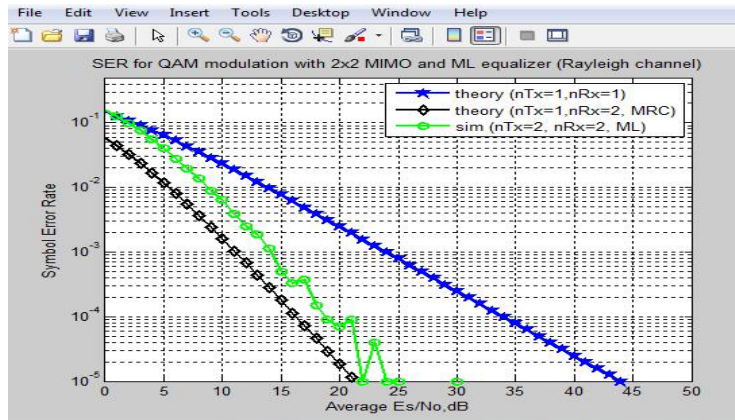


Fig. 6 BER for ML Equalizer for QAM

Table 6
Theoretical and Simulated BER table for ML equalizer (QAM Modulation)

Eb/No In dB	Theoretical BER for nTx=1,nRx=1	Theoretical BER for nTx=1,nRx=1(MRC)	Simulated BER for nTx=2,nRx=2(ML)
0	0.146447	0.058058	0.15812
10	0.023269	0.001599	0.0058
20	0.002481	1.84E-05	0.00012
30	0.00025	1.87E-07	0
40	2.5E-05	1.87E-09	0

Fig.6 and table 6 shows the BER performance for QAM modulation for 2x2 MIMO system using ML equalizer in Rayleigh channel. Black lines show the theoretically ideal value for BER. Green line shows the simulation result. From the graph we can see that performance of ML equalizer is similar to MMSE equalizer and it shows better improvement than ZF and ZF-SIC equalizer.

From comparing all the six equalizer for QAM modulation the result for ML and MMSE Equalizer is best among these above mentioned equalizer in terms of cancelling the interference to optimum level.

V CONCLUSION

To achieve higher data rate and least BER is the demand of wireless system design. Equalization techniques play very important role for designing such system. In this paper performance comparison of different key equalization techniques has been carried out under the fading and noisy environment to find out the appropriate equalizer for 2x2 MIMO systems. From the result obtained it is evident that zero forcing equalizer shows better performance if noise is zero and shows degradation under fading environment.

The performance of ZF-SIC, MMSE, and ZF-SIC with optimal ordering, MMSE-SIC with optimal ordering and ML equalizer are in increasing order. From the results it can be concluded that the ZF equalizer is best among these above mentioned equalizer in term of cancelling the interference to optimum level.

REFERENCES

[1] G.L. Stuber, J.R. Barry, S.W. Mclaughlin, Ye Li, M.A. Ingram And T.G. Pratt, "Broadband MIMO-OFDM Wireless Communications," Proceed-IngS Of The IEEE, Vol. 92, No. 2, Pp. 271-294, February. 2004.

[2] 'Fading' – Online Article In Wikipedia En.Wikipedia.Org/Wiki/Fading 'A Comparative Study Of Rayleigh Fading Wireless Channel Simulators' By VRS Ramaswamy Bit Error Rate Performance In OFDM System Using MMSE & MLSE Equalizer Over Rayleigh Fading Channel Through The BPSK, QPSK, 4 QAM & 16 QAM Modulation Technique.

[3] D. W. Tufts, "Nyquist's Problem-The Joint Optimization of Transmitter and Receiver in Pulse Amplitude Modulation," Proc. IEEE, Vol. 53, Pp. 248-260, Mar. 1965. "Techniques For Adaptive Equalization Of Digital Communication Systems," Bell Syst. Tech. J., Vol. 45, Pp. 255- 286, Feb. 1966 "Adaptive Equalization" By Shahid U. H. Qureshi, Senior Member, IEEE Vol.4, No.4, October, 2010. "Zero-Forcing Equalization For Time-Varying Systems With Memory "By Cassio B. Ribeiro, Marcello L. R. De Campos, And Paulo S. R. Diniz. Zero-Forcing Frequency Domain Equalization For Dmt Systems With Insufficient Guard Interval By Tanja Karp, Martin J. Wolf , Steffen Trautmann , And Norbert J. Fliege. Digital Communications. New York: Mccraw-Hill, 1983.

[4] G. Leus, S. Zhou, and G. B. Giannakis, "Orthogonal Multiple Access Over Time- And Frequency-Selective Channels," IEEE Transactions on Information Theory, Vol. 49, No. 8, Pp. 1942–1950, 2003.

[5] Rashmi Kashyap, Jaspal Bagga, "Performance Evaluation Of Equalization Techniques Under Fading and Noisy Environment For MIMO Systems In Wireless Communication" IJRIT, Volume 2, Issue 6, June 2014, Pg: 478-487

[6] Anuj Kanchan, Shashank Dwivedi, "Comparison of BER Performance In OFDM Using Different Equalization Techniques", International Journal Of Engineering And Advanced Technology (IJEAT) ISSN: 2249 – 8958, Volume- 1, Issue-6, August 2012, Pp. No. - 139-143